





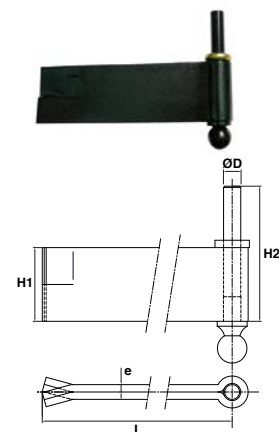


Modèle haut gauche



J624.. Equerre BBB

Code		L	H	l	e	ØD	Déport	Ø trous	Nbre de trous		Dispo. (sem.)
Modèle haut gauche											
J624866		550	400	50	6	14	18	8,5	8	1	Nous consulter
J624876		800	600	60	8	18	25	9	9	1	Nous consulter
Modèle haut droite											
J624816		550	400	50	6	14	18	8,5	8	1	Nous consulter
J624826		800	600	60	8	18	25	9	9	1	Nous consulter
Modèle bas gauche											
J624966		550	400	50	6	14	18	8,5	8	1	Nous consulter
J624976		800	600	60	8	18	25	9	9	1	Nous consulter
Modèle bas droite											
J624916		550	400	50	6	14	18	8,5	8	1	Nous consulter
J624926		800	600	60	8	18	25	9	9	1	Nous consulter

J62483.. Gond à sceller BBB

Code		L	H1	H2	e	ØD		Dispo. (sem.)
J624834		180	60	110	6	14	1	Nous consulter
J624836		220	60	122	8	18	1	Nous consulter

J6255.. Penture BBB milieu

Code		L	l	e	ØD	Déport		Dispo. (sem.)
Milieu gauche								
J625566		400	50	6	14	18	1	Nous consulter
J625576		600	60	8	18	25	1	Nous consulter
Milieu droite								
J625516		400	50	6	14	18	1	Nous consulter
J625526		600	60	8	18	25	1	Nous consulter

J625.. Gond paumelle à visser BBB milieu

Code		L	l	e	ØD	Déport		Dispo. (sem.)
Gauche								
J625037		400	50	6	14	18	1	Nous consulter
J625041		600	60	8	18	25	1	Nous consulter
Droite								
J625036		400	50	6	14	18	1	Nous consulter
J625040		600	60	8	18	25	1	Nous consulter